



BOSS[®]
PRODUCTS

**WINDOWS
DOORS &
FACADES**





BOSS 396 Neutral Silicone Sealant

BOSS 396 is a high-quality, neutral cure, low-odour silicone sealant designed with excellent weather resistance and flexibility make it ideal for both interior and exterior sealing around window and door perimeters. It offers excellent adhesion to a wide range of substrates commonly used in fenestration applications, including glass, uPVC, aluminum, concrete, and wood.

APPLICATION

- Sealing around window frames.
- Perimeter sealing of door frames.
- General glazing and weather sealing in residential and commercial buildings.

FEATURES



Non-Corrosive & Odourless



Durable



UV & Weather Resistant



Permanent Flexible

COLOURS



Clear



Black



White

PACKAGING

Available in 270ml cartridge



BOSS 352 Paintable Sealant

BOSS 352 is a high-quality, one-component plasto-elastic joint sealant based on silicized acrylic dispersions. It offers excellent adhesion to porous surfaces and aluminium and is waterproof and colourfast after curing. The sealant is easy to apply and can be painted over once cured.

APPLICATION

- Sealing around window frames.
- Sealing around plaster board.
- Fills cracks and holes before painting.
- Sealing low movement joints.

FEATURES



Paintable



Durable



Non-Slumping

COLOURS



White

PACKAGING

Available in standard 450gms cartridge



BOSS 333 Triple Expanding Foam

BOSS 333 is a one-component, self-expanding PU foam that is ready to use and eco-friendly with CFC- and HCFC-free propellants. It offers excellent dimensional stability, high filling capacity and superior thermal and acoustic insulation. The foam adheres well to most surfaces except PE, PP and PTFE.

APPLICATION

- Sealing gaps between window frames and walls to prevent air and water leakage.
- Filling cavities around window sills and lintels for thermal insulation.
- Fixing window frames during installation to provide stability and support.
- Insulating joints in multi-pane window systems to improve energy efficiency and soundproofing.
- High thermal and acoustic insulation.

FEATURES



Thermal Insulation



Acoustic Insulation



Good Adhesion



Fill and Fix

COLOURS



Champagne

PACKAGING

Available in 750ml aerosol can

BOSS 388

**Choose your colour,
seal *with* confidence**





BOSS 388

Weather Neutral Sealant

BOSS 388 is a one-part, neutral-cure silicone sealant designed for long-lasting performance in external and internal construction joints. It bonds effortlessly to laminated uPVC profiles, coated aluminum, ACP, and glass—making it the ideal choice for modern facades and fenestration systems. Available in multiple colors.

APPLICATION

- BOSS 388 is ideally suited for weatherproofing, waterproofing, sealing of uPVC and Aluminum windows and is most ideal for ACP.
- BOSS 388 has excellent adhesion to , glass, glazed surfaces, concrete, galvanized steel, anodized aluminum, cement, wood, ceramics, painted surface and many plastics.

FEATURES



Non-Corrosive



Neutral Cure



Waterproof

COLOURS



Clear



Black



White



Brown



Light Brown



Bronze



Light Grey

PACKAGING

Available in 280ml cartridge





BOSS 334 Gun Grade Foam

BOSS 334 Gun Grade Foam is a one-component, self-expanding polyurethane foam dispensed using a foam gun for precise application. It cures with moisture to form a durable, airtight and insulating seal. It is designed for professional sealing, filling and insulating in construction joints.

APPLICATION

- Sealing gaps between door frames and walls.
- Fixing and insulating door frames during installation.
- Preventing air, dust, and water infiltration around doors.
- Enhancing soundproofing and energy efficiency around door perimeters.

FEATURES



Acoustic Insulation



High Yield



Fill and Fix

COLOURS



Champagne

PACKAGING

Available in 750ml aerosol can



BOSS 354 Interior & Exterior Sealant

BOSS 354 is a Premium, plasto elastic siliconized acrylic sealant ideal for internal and external sealing around door frames. It is easy to apply, paintable, and offers excellent adhesion on porous surfaces and aluminium.

APPLICATION

- Connection joints in the building industry.
- Sealing joints on door frames.
- Filling gaps between plinths and walls.
- Sealing joints in masonry, along skirting boards, and around cornices.

FEATURES



Interior & Exterior



Flexible



Paintable

COLOURS



White

PACKAGING

Available in standard 270ml caulking cartridge



BOSS Rapid Fix Ultra SMX Polymer

BOSS Rapid Fix Ultra is a high-tack SMX polymer adhesive designed for heavy-duty bonding and sealing, both indoors and outdoors. It delivers exceptional initial grab and durable bonding, suitable for porous, non-porous, wet and humid surfaces.

APPLICATION

- Bonding wooden door frames to concrete, brick, or stone surfaces.
- Mounting decorative panels (ACP, WPC, plywood) on door surfaces or surrounds.
- Fixing hardware or fittings on doors in bathrooms and kitchens.
- Sandwiching door frames between stone or cladding materials.
- Elastic bonding of door panels, trims, or profiles.
- Sealing low-movement joints around door thresholds and sills.

FEATURES



Fast Cure



UV Resistant



Versatile Adhesive

COLOURS




White

PACKAGING

Available in 480g cartridge



EXIT

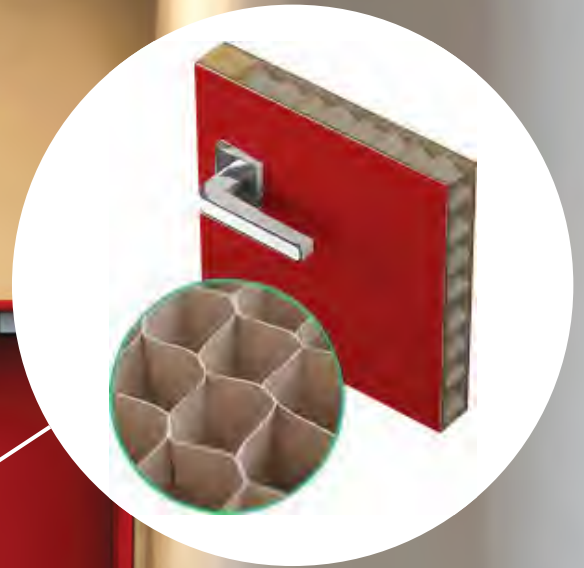

BOSS 7247BS
PU Panel Adhesive



BOSS 813+ Fire Grade Foam

BOSS 813+ Fire Retardant foam is a one-component, self-expanding, ready to use PU-foam, which contains HCFC-free and CFC-free Propellant which are not harmful for the ozone layer. The product has fire-retardant characteristics, according to the European standard EN 1366-4.

APPLICATION

- Installation of fireproof doors and windows.
- Sealing of fire-retardant joints and other construction joints.
- Sealing gaps in electric installations.

FEATURES



Fire Retardant
up to EI 240



Acoustic
Insulation



High
Yield

COLOURS



Pink

PACKAGING

Available in 750ml aerosol can



BOSS 236 Hybrid Adhesive

BOSS 236 is a premium, one-component, hybrid polymer-based adhesive sealant with very high initial tack. It is designed for structural and elastic bonding in demanding construction applications.

APPLICATION

- Elastic bonding of panels, profiles, and other elements on most common substrates (wood, MDF, chipboard, etc.).
- Panel fixing, HPL/ACP bonding, mirror installation, facade stone cladding, and other interior applications.

FEATURES



Fast Cure



High Tack



COLOURS



White

PACKAGING

Available in standard 600ml sausage





BOSS 390 Glazing Silicone Sealant

BOSS 390 is a one-component, structural glazing sealant with excellent Tensile strength and aging resistance, ideal for curtain wall glazing. It offers strong adhesion on most substrates.

APPLICATION

- Structural glazing for curtain walls (glass and aluminum).
- Sealing in skylights, metal structures and other industrial construction assemblies.

FEATURES



Non-Corrosive & Odourless



Excellent Weatherability



Good Adhesion



Excellent Mechanical Properties


COLOURS



Black

PACKAGING

Available in 280ml cartridge

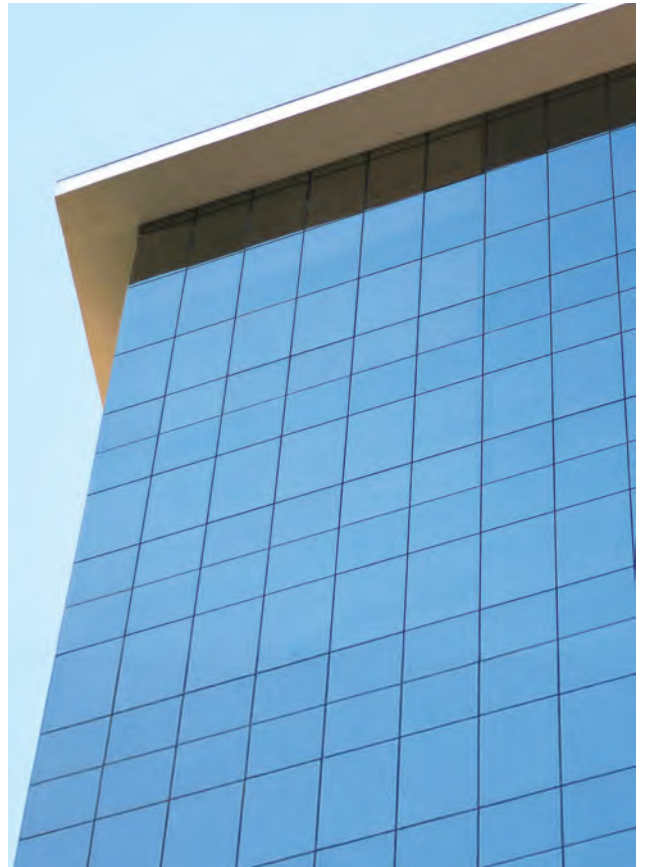

BOSS 389+ Weather Sealant

BOSS 389+ is a one-part, neutral-cure, construction-grade silicone sealant designed for weatherproofing applications. It cures at room temperature using atmospheric moisture to form a durable, flexible seal with excellent adhesion to materials like ACP, glass, coated aluminium, wood and masonry. Ideal for both interior and exterior use, it offers superior weather resistance, non-corrosive properties and long-term durability.

APPLICATION

- Sealing joints between ACP panels and structural frames.
- Weatherproofs window perimeter joints in curtain walls.
- Sealing expansion joints in façade cladding systems.
- Sealing coated aluminium or glass panels in façades.
- Fills façade gaps to block water/air.
- Seals joints between varied materials.

FEATURES



50% joint movement



UV Resistant



Non-Slumping

COLOURS



Clear



Black



White




Anthracite Grey



Grey

PACKAGING

Available in 290ml Cartridge and 600ml Sausage for specific colours.

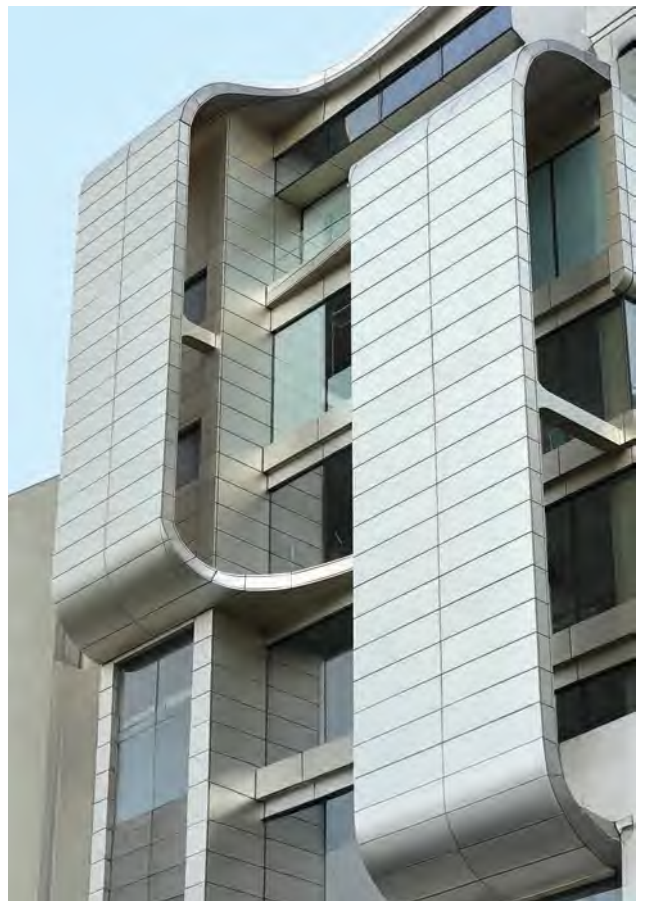

WINDOW, DOOR & FACADE APPLICATION

SILICONES - ACETOXY

Product Name	Colour	Skin Formation Time	Tensile Strength	Elongation at Break	Shore A Hardness	Remarks
BOSS 122	Clear, White, Black	5-15 mins	1.3-1.8 N/mm ²	>300%	15-25	Fast curing; excellent adhesion
BOSS GP	Clear, White, Black	5-30 mins	1.3-1.8 N/mm ²	>300%	15-25	Good adhesion to glass and glazed surfaces

SILICONES - NEUTRAL

BOSS 388	Clear, Light Grey, Black, White, Light Brown, Brown, Bronze.	5-15 mins	0.8-1.5 N/mm ²	>300%	25-35	Neutral cure; Non-corrosive; weather sealant
BOSS 389+	Anthracite Grey, Clear, Black, White, Dark Grey	8 mins	1.0-1.5 N/mm ²	≥700%	30-35	Excellent unprimed adhesion to most construction materials
BOSS 390	Black	20 mins	2.3 N/mm ²	480%	47	Excellent Tensile strength and aging resistance
BOSS 394	Clear, Black, White	3-10 mins	1.0 - 1.4 N/mm ²	>450%	18-25	Low modulus & VOC compliant
BOSS 396	Clear, Black, White, Grey-white & Pure White	6 mins	≥1.0 N/mm ²	≥600%	30-35	Neutral cure, general purpose window perimeter sealing

ACRYLIC

Product Name	Colour	Skin Formation Time	Temperature Resistance	Application Temperature	Maximum Allowed Distortion	Remarks
BOSS 352	White	5-10 mins	-20 → +80 °C	5 → 30 °C	12%	Can be painted over after curing
BOSS 354	White	5-10 mins	-20 → +80 °C	5 → 30 °C	15%	Can be painted over after curing
BOSS 386	Brown, Light Brown	5-10 mins	-20 → +80 °C	5 → 30 °C	15%	Colourfast and waterproof after curing
BOSS Acryseal	White	10 mins	-20 → +80 °C	5 → 30 °C	12%	Can be painted over after curing
BOSS Window & Door	White	5-10 mins	-20 → +80 °C	5 → 30 °C	15%	Can be painted over after curing

HYBRID

Product Name	Colour	Skin Formation Time	Tensile Strength	Elongation at Break	Shore A Hardness	Remarks
BOSS Rapid Fix	White	20-25 mins	1.7 N/mm ²	>200%	50±5	Fast curing with high initial tack
BOSS 236	White	5 mins	3.0 N/mm ²	500%	50±5	High shear strength after full cure
BOSS 240	Black	15 mins	3.50 N/mm ²	>250%	45±5	High end strength

POLYURETHANE FOAM

Product Name	Colour	Temperature Resistance	Cutting Time	Skin Formation Time	Remarks
BOSS 333	Champagne	-40°C - +90°C	30 min	8 min	High insulation value: thermal and acoustic
BOSS 334	Champagne	-40°C - +90°C	30 min	7 min	High insulation value: thermal and Acoustic, gun grade foam
BOSS 813+	Pink	-40°C - +90°C	50 min	9.5 min	Fire resistant in a joint (EN 1366-4)

OTHERS

Product Name	Base	Colour	Skin Formation Time	Tensile Strength	Elongation at Break	Shore A Hardness	Remarks
BOSS 7247 BS	Polyurethane	Light Brown	20 → 30 mins	----	----	----	Flexible Panel Adhesive
BOSS 7132	Synthetic Rubber	Transparent	45 mins	≥4.10 N/mm ²	≥1000%	----	Protects the cut edges of aluminium profiles against corrosion
BOSS 7142	2-Component Polyurethane	Beige	45 mins	----	----	65	Bonding corner pieces in aluminium window profiles by post-injection (injection after assembly)

BOSS[®]

PRODUCTS



SCAN TO CONNECT

ACCUMETRIC SILICONES PVT LTD

4th Floor, Door No. II - 23, Survey No. 296/11, 296/12,
VSI Estate, Kottivakkam, Thiruvanniyur, Chennai - 600041
+91 9090 4030 54 | info@bossproducts.in | www.bossproducts.in
Toll Free: 1800-102-100

Authorized Dealer